


### CERTIFICATE OF PERFORMANCE

#### LEAD REDUCTION

A 10" x 2" **DOULTON ULTRACARB** filter element was assessed for lead reduction performance.

The water conditions and test filter details are given below:-

Average influent: 182 ppb  
Flow rate: 1.9 L/min  
Low pH (NSF test water Std 53 - 1994)  
Metal rig 8 hrs per day (15 mins on / 15 mins off)  
Filter: 3.7 $\mu$ m      Insert: 92.5 mmHg  
Date test performed : October 1996

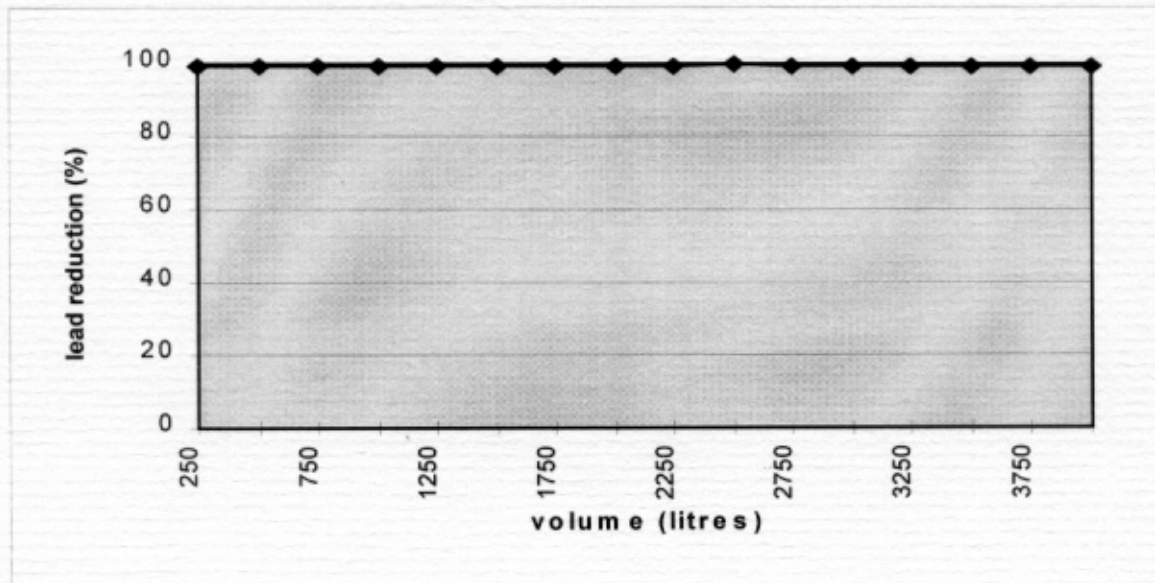

#### Conclusion

The lead reduction was found to be continuing at >99% after 4000 litres (1000 US gallons)