


CERTIFICATE OF PERFORMANCE

CHLORINE REDUCTION

A 10" x 2" **DOULTON ULTRACARB** filter element was assessed for chlorine reduction performance.

The water conditions and test filter details are given below:-

Flow rate: 1.7 L/min
Dosing 2.0 ppm free chlorine
Metal rig 8 hrs per day (10 mins on / 10 mins off)
Insert: 145 mmHg
Date test performed: 07/08/95

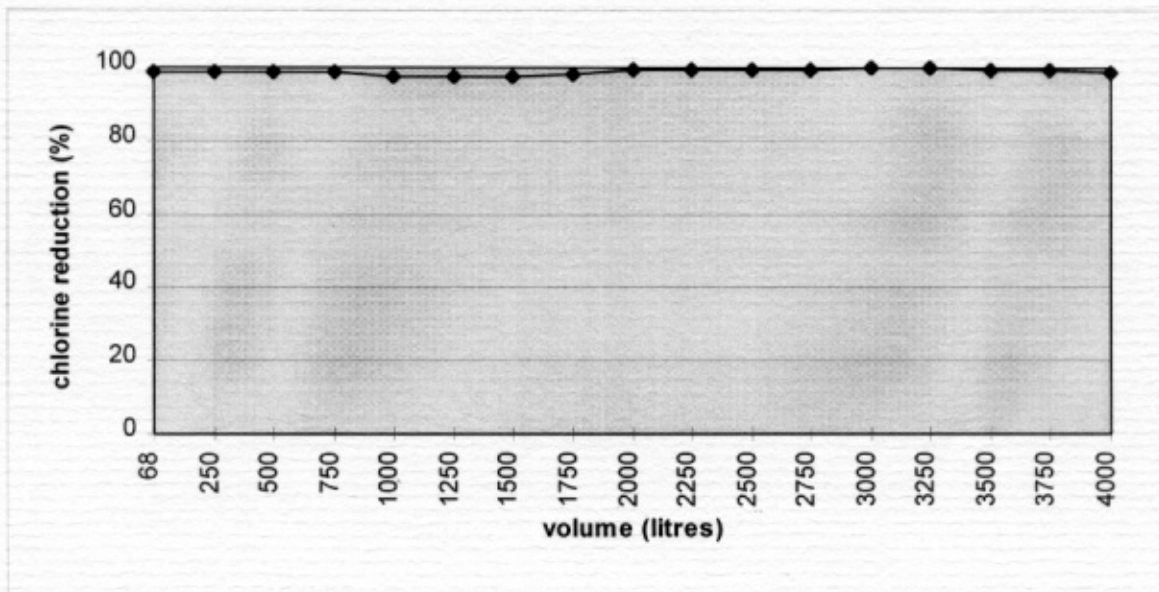

Conclusion

High efficiency chlorine reduction continues for at least 4000 litres (1000 US gallons)