



Contents

warnings & important information
General Maintenance
Features and Modes
Options & Operation
Dispenser Icon Codes
Filtration Information
Changing the filter
Service Support
Warranty

Warnings & Important information

- For continued safety of this appliance it must be installed, operated and maintained in accordance with the manufacturer's instructions.
- Your appliance should be installed by a suitably qualified tradesperson.
- For correct operation of this appliance it is essential to observe the instructions as outlined in this booklet.
- Do not use this appliance with water that is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the system.
 Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.
- Filter replacement must be performed at intervals of not more than 6 months.
- Use this appliance only as directed in these instructions and only for its designed purpose.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- This appliance is not suitable in an area where a water jet could be used.
- Children should be supervised to ensure that they do not play with the appliance.
- DANGER: The operation of the thermal cut-out indicates a possibly dangerous situation. Do not reset the thermal cut-out until the water heater has been serviced by a suitably qualified person.
- WARNING: Do not connect any restrictor or pressure relief device to the vent pipe of this water heater if installed.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid creation of a hazard.

- New hose sets supplied with the appliance are to be used. Old hose sets should not be re-used.
- Billi hose sets as supplied with the appliance are to be used. Old or other manufacturer's hose sets should not be re-used.
- If the appliance is located where the ambient air temperature could fall below 4°C when the heater is not in use, do not turn off the power supply to the appliance. This safeguard does not offer the same protection to the connecting pipework and fittings.
- The ambient temperatures this unit should operate within are 4°C to 45°C.
- Turn off power to unit, by unplugging the power cord from the power point, if water supply is turned off

Caution and safety

Boiling water is dangerous and can cause severe burns, particularly with young children. Boiling water must always be handled with caution. Use this appliance only as directed in these instructions and only for the purpose for which it has been designed. Your Billi Alpine is designed to be safe and practical. In an environment with young children, it is recommended that the boiling water safety switch is activated.

The following safety features have been included:

- Ergonomic levers, or sensitive touch panel control water flow
- Levers/touch activations located safely above water outlet.
- Smooth electronically controlled boiling water flow rate. Flow is briefly reduced as water first enters cup to prevent splashing.
- Dispenser remains cool to touch.
- Childproof safety switch.
- Boiling water Safety Isolation mode.

General Maintenance

Your Billi Alpine has been designed to require minimal maintenance other than replacement of filter cartridges. During each filter change, check all water connection fittings for signs of leakage. Check all tubing for any signs of damage. Check the cupboard area around the base of unit for any signs of moisture. Ensure side vents of the under bench module are kept clear and airflow is not obstructed. Restricted airflow will cause inefficient operation of the refrigeration system.

—Cleaning the dispenser

Your Billi Alpine Dispenser is fabricated from robust metal with a tough protect chrome plating. Care of dispenser is as with any chrome plated tapware. Avoid using abrasive cleaners. Wipe clean using a damp cloth. Use of a non-solvent, non-smearing cleaner such as Windex is recommended. Do not pour water over dispenser.

Cupboard ventilation requirements

Your Billi Alpine underbench module requires no cupboard ventilation but requires air space around the unit of 25mm. Care should be taken when using the cupboard space, to avoid stretching or damaging plastic pipe work. Check fittings and tubing at each filter change for signs of damage or leakage. Always ensure access to power switch and water supply tap is not restricted.

Features and Modes

-Dispenser Swivel

The Alpine dispenser incorporates a swivel function, allowing the dispenser to be swung out of the way if more sink space is required. A central position stop provides positive location during normal usage.

-Billi Alpine 125 Dual Temp Dispenser

The Billi Alpine 125 dispenses both chilled and ambient filtered water. This system will never run out of filtered water.

—Adjustable chilled water temperature

The chilled water delivery temperature can be adjusted to suit your preference. The blue control knob, located on the front of the Chiller Module, can be adjusted if a cooler or warmer temperature is required.

-Safety Timeout

Your Billi Alpine incorporates a water delivery Safety Timeout to prevent an uncontrolled flow of water. Water flow stops automatically after a set time interval. Flow can be started again by releasing and pressing the dispenser lever. Chilled water timeout – 1 minute:

· · · ·

Ambient water timeout - 1 minute

-Holiday mode (Alpine 125 Only)

Holiday Mode is provided to save energy when the unit will not be used for long periods. In this mode both the water chiller and water heater are disabled and the unit will use very little power. Pressing the Pressure Relief button places the unit in Holiday Mode. The unit will exit Holiday Mode if either the power is turned off then on or if any of the tap levers are pressed. The Self Learning Timer will ignore user behaviour while the unit is in Holiday Mode and resume normal operation when the mode is terminated. Holiday Mode is indicated by the moon & star icons.

-Standby Mode (Alpine 125 Only)

Standby operation may be optionally enabled to reduce power consumption. In standby mode the cold water set point is increased to 18°C. When enabled, standby is invoked after two hours from the time of last use. When a tap lever is pressed in standby no water is dispensed. The indicators will flash to indicate the water is not ready. The tap lever can be repressed to dispense water. To activate, refer to **Options**.

Options and Operation

Alpine 060 & 120 Models

-Slimline Dispenser

To dispense chilled filtered water either gently push the lever back or pull it forwards. The lever will automatically return to the off position. The spout can be swiveled to suit your installation.

Alpine 125 Models

To operate, simply press the left lever to dispense boiling water and the right lever to dispense chilled. When lifted the levers will latch for continual delivery, released with a light press.

—To enter the options mode:

- 1. Turn on the unit and wait for normal operation (icons are both illuminated constantly).
- Push both the hot and cold levers down & then while holding the two levers down press the safety switch at rear of tap. Hold both levers and safety switch for 3 seconds.
- 3. Icons will flash yellow.
- 4. Release both the levers & safety switch.
- 5. Unit is now in options mode.
- 6. If you wish to change or set the safety switch mode, follow the safety switch settings procedure below. If you wish to change or activate the power saving mode follow the power save mode settings procedure below.

—Power save mode settings (EcoIntelligence, standby or on 24/7)

The Green icons on the tap indicate the power save level that is selected. To change or activate a setting press and release the cold lever to scroll through the following options:

- Blue Icon Blinking: indicates Standby Mode is enabled.
- Blue Icon On: indicates system is in 24 hour continuous mode.

To save new setting and exit Options Mode, press the safety switch and release. Wait 10 seconds for unit to return to normal operation.



Dispenser Icon Codes for Alpine 125 only

Orange dot.

Flashes when filter change due. On constant when overdue.

Green leaf illuminated.

Green moon & stars flashing.

In standby mode.

Green moon & stars illuminated.

In holiday mode.

Blue dot.


Flashes when Chilling. On constant when chilled water ready.

White dot.

On constantly.

Blue & white dots will flash yellow if the unit goes into fault.

Dispenser Icon codes

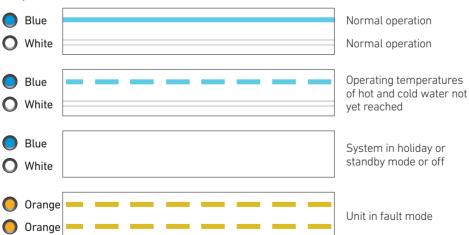

Billi Filter Cartridges

The Bill Alpine is fitted with single dual action filter incorporating sediment and chemical removal elements. All Billi Alpine filters are manufactured using bacteria and biofilm resistant materials for improved water quality.

Premium filters provide better tasting water due to the high quality, carbon chemical removal filter. Sub micron rated, these filters have excellent chemical absorption, removing or reducing chlorine, volatile organic compounds (VOCs), chemicals, tastes and odours. Use only genuine filters as designed for this system. All drinking water filtration systems should be flushed after a period of non-use. If your Billi Alpine has not been used for a period of 48 hours or more, operate the lever and run water for 1 minute then release the lever

—Replacement of Billi Filter Cartridge

Periodic replacement of your Bill Alpine Filter Cartridge is necessary to maintain the cleanliness of your drinking water. Billi recommends a filter replacement every 6 months. A replacement filter change service is available. If you wish to install the replacement filter cartridges yourself, your Billi representative will provide genuine Billi replacement filter cartridge sets.


Billi Filter Cartridges - Reduces & Removal


Filter Type	Order Part No.	Suits	Micr.	Filters	Sediment	Chlorine	VOCs	Chemicals	Taste Odour	Fluoride Minerals	Expected Life
Prem.	990413	Billi Alpine	sub	Single	✓	✓	✓	✓	✓	Slight	6 - 12 months
Stand.	990402	Billi Alpine	5	Single	✓	✓	✓	✓	✓	✓	6 - 12 months


Filter removal and replacement instructions

Important note: Please ensure you remove the foam packing under the filter before installing.

- 1. Remove the front panel.
- Place the unit in Holiday Mode by pressing the Pressure Relief button once.
 The lights on the dispenser will alternate and then go off
- Hold filter and swing towards you slowly.
 The top of the filter is in a hinged cradle assembly. It should stop after approximately 30 degrees of travel.
- 4. The filter can now be released from the holding cradle by pulling down on the filter.
- 5. Take care not to spill water in the base of the tray. If so wipe gently with absorbent paper.
- 6. Install new filter into the same location by pushing all the way up into the cradle.
- 7. Push filter back into the unit until it locks into place. Power light should come back on.
- Lift cold lever for the levered style taps or touch and hold the blue icon for the touch activated taps and run until water flow stops. Close cold lever, or remove your finger from the blue icon and wait for 10 minutes.
 - Lift cold lever or touch and hold again and run until water stops. Close cold lever or remove your finger from the blue icon.
- 9. Check for any leaks from around the filter, hosing or pipeworks.
- 10. Replace the front cover.







Thank you for choosing to install a Billi Alpine Drinking Water Appliance. Your Alpine is manufactured to exacting standards using high quality materials and with proper maintenance and care, should function for many years.

For information on our filtration please contact The Watershop on (02) 9458 1111.

For technical support please call 1800 812 321 and speak to one of Billi's experienced technician's.

To book a service call out request a filter change please contact The Watershop.

Filter cartridges are also available for purchase from The Watershop.

Warranty

Subject to the warranty exclusions set out below, if a defect in a new product supplied by Billi Pty Ltd (ACN 124 066 717) ("Billi") and purchased by you ("customer") from a reseller authorised by Billi occurs within 24 months of the date of purchase of the product as a result of defective materials or defective manufacture by Billi, and Billi receives a written claim (containing details of the product defect together with a receipt from the reseller of the products showing the date of purchase of the products, or such other proof of purchase and the date of purchase as Billi may accept) within 25 months of the date of purchase, Billi shall, at its discretion:

- a) direct an accredited service provider to attend the customer's premises (provided that the premises are located within Australia) and repair the defect free of charge; but if the customer's premises are located more than 25 kilometres from one of Billi's authorised service agent's locations then the customer will be liable for any increased freight costs, fees, charges or levies Billi may incur as a result of fulfilling its obligations under this paragraph a) of this Product Warranty; or
- b) direct the customer to return the product to Billi so that Billi may provide a replacement product free of charge. If Billi elects to do this, Billi will also pay the necessary freight charges, and the customer will pay for the removal of the product and the costs of reinstalling the replacement product.

Any product replaced or repaired under this Product Warranty will be covered by the product's remaining warranty period, or three months, whichever is greater. If the product or any part thereof is replaced by Billi under this Product Warranty, all of the right, title and interest in and to the replaced product or part shall vest in Billi upon it being replaced.

-Warranty exclusions

- 1. Billi shall not be liable under this Product Warranty:
 - a) unless the product was installed correctly and as per the installation instructions supplied with the product;
 - b) if the defect is contributed to or caused by any improper usage of the product or usage of the product for purposes other than that for which the product was designed or intended;
 - c) if the defect occurs wholly or partially as a result of any act or omission by the customer, or any person other than Billi;
 - d) if the product is subject to misuse, neglect, accident or abuse or the customer continues to use the product after the defect becomes apparent;
 - e) if the product is damaged as a result of poor water quality;
 - f) if the product is repaired, or any attempt to repair the product is made, by anyone other than an authorised repairer of the products acting at Billi's direction; or
 - g) if the product is altered or modified in any way unless such modification has been approved in writing by Billi.
- 2. Notwithstanding anything to the contrary, filters are not covered by this (or any other) Product Warranty.

-Limitation of liability

- 3. Except for the Product Warranty set out above, and except for any liability in connection with the supply of goods imposed on Billi by the Trade Practices Act 1974 (Cth) and other similar state and territory legislation (including for breach of implied conditions and warranties) which cannot, or which can only to a limited extent, be lawfully excluded, all liability of, and conditions and warranties relating to the supply of the products by, Billi are hereby expressly excluded. Any such liability which cannot be lawfully excluded is limited, at Billi's option, to any one or more of the following:
 - a) the replacement of the goods or the supply of equivalent goods;
 - b) the repair of the goods:
 - c) the payment of the cost of replacing the goods or of acquiring equivalent goods; or
 - d) the payment of the cost of having the goods repaired.



Designed and manufactured in Australia.

As Billi Pty Ltd has a policy of continual improvement, all details are subject to change without notice. All goods are sold subject to our published terms and conditions. Billi is a registered trademark. 1012