

Alpine Specification Sheet

Instant chilled filtered drinking water



An endless stream of refreshing chilled or ambient filtered water.



-Lowest Energy Consumption

The Billi Alpine utilizes Billi's unique high performance Thermostore tank, which features superior insulation to keep the water cold, and ensuring less energy is used during the chilling process . In addition the Alpine 125 model has Standby Mode which will ensure after set period of non-usage the unit will power down to prevent excess energy consumption.

-Australia's smallest underbench footprint

With dimensions of just 340mm high by 180mm wide by 460mm deep, this under bench unit is designed to maximise available space under the sink.

-No cupboard ventilation required

The Billi Alpine models do not require cupboard ventilation grilles and fans.



-Adjustable chilled temperature

A simple adjustable control knob allows the chilled water temperature to be raised to 15 C or lowered to 6 C for perfectly chilled, refreshing drinks, with your required temperature being quickly reached and maintained.

-Chilled & Ambient option available

The Billi Alpine 125 dispenses chilled and ambient through the Billi dual temp dispenser.

-Endless supply of filtered water

The Billi Alpine models will continue dispensing ambient filtered water after the chilled tank is fully drawn.

-Choice of Styles

The Billi Alpine 060 and 120 are available with an optional square profile slimline dispenser. The Billi Alpine 125 is available in any of the dual temp dispenser styles

-Australian designed, manufactured and owned.













Alpine Specification Sheet

Specifications and guide to model selection

Product Code	Model	Dispenser Type (supplied standard)	Initial cup delivery suggested no. of persons	Chilled water delivery cups per hour	Current draw amps	Height mm	Width mm	Depth mm
932 060	Alpine 060	Round Slimline	12	60	10	340	180	460
932 120	Alpine 120	Round Slimline	20	120	10	340	180	460
932 125	Alpine 125	Dual temp dispenser	20	120	10	340	180	460

Water supply

A single 15mm (1/2") stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa.

Power supply

The Billi Alpine models require a standard 10 amp power outlet. It is supplied with a 1 metre flex cord and plug.

Warranty

All components of the Billi units are covered by a 24 month warranty. Filter cartridges are a consumable and are not covered by warranty, as water conditions and usage vary.

Certifications

Every Billi drinking water appliance is manufactured under a certified quality control system. The Billi Alpine models have been tested and comply with all required standards including: Watermark Licence Number 21525; Tested to; AS3498 and AS/NZS4020; Victorian Electrical Safety Act 1998 Approval Number CS100600V, AS/NZS ISO 9002; AS1428 Accessibility Design Requirements; Section J6 of the BCA; Certificate Number QEC 11627; C-Tick approved.


Filtration

Billi's premium filters ensure that health threatening pollutants and impurities such as sediment, chemicals, heavy metals, chlorine and pesticides are safely removed leaving you with refreshingly clean drinking water. All Billi cartridges are certified by global public safety agency NSF International*. Filter changes are made simple by our swing-change system and replacement cartridges are available online at www.billi.com.au. Optional sub micron and premium submicron filters are available.

Options and accessories

- Dispenser Styles: The Billi Alpine 060 and 120 models style option is the square profile slimline dispenser. The Billi Alpine 125 model is supplied standard with the XL Levered tap pictured below. Style options are the XT Touch Tap, XR Remote Tap and the QL Quadra Levered Tap.
- Dispenser Finishes: Standard finish for the Dispenser is Bright Chrome. Optional finish— Brushed Chrome or Black Chrome.
- Billi Font: Allows the dispenser to be located away from sink areas.
 Finished in polished Stainless Steel, optional brushed or black chrome finish available.
- Dispenser Riser: Alpine 125 model only.
 70mm dispenser extension supplied standard with the Billi Font.
- Tubing Extension Kit: Allows the dispenser to be offset from the under bench unit by up to 2 metres.

Preferred installation layout

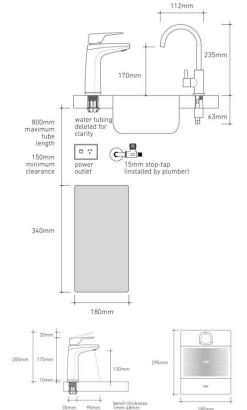

XL Levered tap dimensions



Font dimensions